



WRAP AROUND FIXTURE



SPECIFICATION

Model Number

CWLA-20061XX-001

Features:

- Can be linkable fast, easy for installation.
- Reasonable size design, reducing transportation cost.
- Unique pressure assembly cover structure, convenient for customer to disassembly and assembly.

Basic parameter

Item Number	LED Type	IP Grade	Product Size(inch/)	Material	N.W.
CWL-20061XX-001	SMD2835/72PCS	IP40	L24.5*W5.3*H0.16 inch (L622*W135*H45 mm)	ALPMMA+PC	0.82
CWL-40121XX-001	SMD2835/96PCS	IP40	L47.4* W5.3*H0.16 inch (L1204*W135*H45 mm)	ALPMMA+PC	1.35


Electrical parameter

Model	Power	Input voltage	Efficiency(%)	Power Factor	Certificate
CWL-20061XX-001	20W	120VAC 50-60Hz	> 90%	> 0.95	DLC ETL
CWL-40121XX-001	40W	120VAC 50-60Hz	> 90%	> 0.95	DLC ETL

Optical parameter

Model	CCT(K)	Luminous Efficiency	Beam angle	Rendering Index
CWL-20061XX-001	3000-5000K	100 LM/W	>120	> 80
CWL-40121XX-001	3000-5000K	100 LM/W	>120	> 80

Photometric

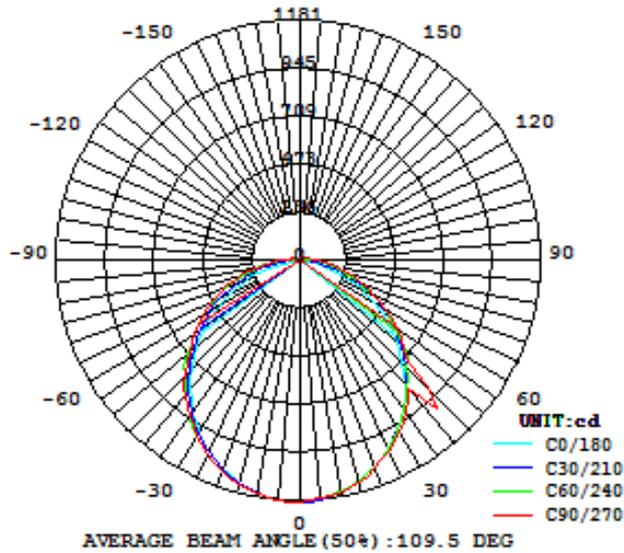

Storage Conditions

Storage temperature	-40°C~+80°C
Operating temperature	-30°C~+45°C (the best in 25°C)
Environment humidity	40-90%RH

Life and Warranty

Life Span	50,000H(Luminance decrease is less than 30%)
Quality Warranty	5 years

Instruction

1. Please read the product specifications carefully first and confirm that the environment is in accordance with the specifications on the specifications before you can install and use them.
2. Before the product is connected to the power supply, make sure the switch is in a disconnected state.
3. Lamps shall be installed by qualified electricians and the wiring shall comply with IEC electrical standards or national standards;
4. This product is suitable for indoor use;
5. Do not use too long or too low voltage in the state of long-term use will affect the normal use of function and life;
6. Shall not be installed in flammable objects and the lamps can't be covered by heat insulation materials or similar materials!
7. When installing, changing and cleaning the lamp, the power supply must be cut off to ensure personal safety;
8. When the lamp is found to work abnormally (self extinguishing or flashing), please check the contact performance of the connecting plug and whether the supply voltage is normal. Often, the failure has not been ruled out, new lights need to be replaced;
9. When the lamp surface needs cleaning, please disconnect the power supply first! Wipe with a soft cloth sticky soapy water wring dry, and then use dry cloth to clean, please don't wait to wipe the surface of the light volatile substance use banana water, please do not spray any chemicals on the lamp, the lamp may otherwise discoloration or damage.
10. Please do not disassemble the product avoid to damage the internal parts. Self removal cannot enjoy warranty service.